

台灣公司 TAIWAN OFFICE

YEAN HERN CORP. | 沅亨興業股份有限公司
No. 28, Heye 8th, Daliao Dist., Kaohsiung City 831130, Taiwan
831130 高雄市大寮區和業八路28號
T. +886-7-7874567 | F. +886-7-7887867
E. yeanhern@jpeyh.com

昆山公司 KUNSHAN OFFICE

JPE YEAN HERN CO.,LTD. | 沅亨流體科技(昆山)有限公司
No. 128, Qianan Rd., Dianshanhu Town, Kunshan City 215345,
Jiangsu Province, China
215345 江蘇省昆山市淀山湖鎮錢安路128號
T. +86-512-57489661-3 | F. +86-512-57489668
E. ksyh@jpeyh.com

張家港公司 ZHANGJIAGANG OFFICE

JPE YEAN HERN CO.,LTD. | 沅亨流體科技(張家港)有限公司
No. 35, Yuefeng Rd., Yangshe Town, Zhangjiagang City 215600,
Jiangsu Province, China
215600 江蘇省張家港市楊舍鎮悅豐路35號
T. +86-512-58797921 | F. +86-512-58267839
E. monica.ding@jpeyh.com



METERING VALVE

計量閥

MV
計量閥
METERING VALVE



特點

CHARACTERISTICS

- 精準控制流量及可關斷設計
 - 防飛出設計
 - 連接方式:JPE 卡套式、內 / 外螺紋連接
- Precise flow control and shut-off design
 - BLOW-OUT PROOF
 - Connection type:JPE Tube End and Male/Female thread


特性

FEATURES


- 閥體冷抽棒材加工, 材質符合 ASTM A269 / A479 標準
 - 可面板安裝, 另附底部安裝孔
 - 額定壓力:2000 psig (138bar) @RT
 - 密封元件材質標準配置氟橡膠 (FKM)
 - 100% 出廠前進行氮氣 500psig 功能性檢測及密封試驗
- Cold drawn bar body, in compliance with ASTM A276/ A479
 - Panel mountable with bottom mounting hole
 - Max working pressure:2000 psig (138bar)@RT
 - FKM packing material as standard
 - 100% Nitrogen functional test and leak test at 500 psig

MATERIAL OF CONSTRUCTION 材質結構

項次 Item	零件名稱 Part Description	數量 Qty.	材質 Material
1	本體 Body	1	SS316L
2	止動插梢 Stop pin	1	SS304
3	本體墊片 Packing	1	SS316L
4	中軸 Bonnet	1	SS316L
5	固定螺帽 Locking Nut	1	SS304
6	閥桿 Stem	1	SS316L
7	密封圈 Oring	1	FKM
8	把手 Handle	1	SS304
9	把手螺絲 Handle Set Screw	1	SS304

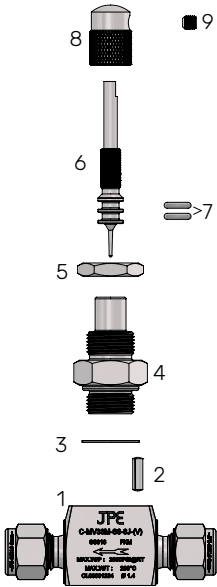

PRESSURE-TEMPERATURE RATING

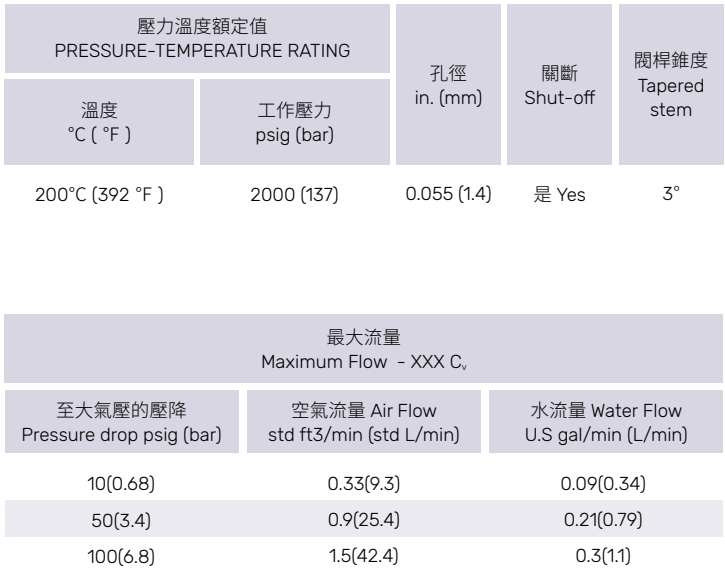


C -	MV33 -	M-	S6-	02	J	(V)	
產品大類及材質	產品名稱	閥件款式	材質	尺寸 (英制)	尺寸 (公制)	連接方式	密封圈材質
CLASSIFICATION & MATERIAL	PRODUCT NAME	VALVE TYPE	MATERIAL	SIZE(FRACTIONAL)	SIZE(METRIC)	CONNECTION TYPE	SEALING MATERIAL
C: 閥門類	MV33: 四角直通計量閥	M: M TYPE	S6: SS316L	01: 1/8"	3: 3mm	J: 卡套式	V: 氟素橡膠
VALVE	METER VALVE					JPE TUBE END	FKM
				015: 3/16"	4: 4mm	MR: 外螺紋 BSPT	EP: 乙丙橡膠
						MALE BSPT THREAD	EPDM
				02: 1/4"	6: 6mm	FR: 內螺紋 BSPT	N: 丁腈橡膠
						FEMALE BSPT THREAD	NBR
						MN: 外螺紋 NPT	FFKM: 全氟化橡膠
						MALE NPT THREAD	FFKM
						FN: 內螺紋 NPT	
						FEMALE NPT THREAD	

- 內螺紋尺寸只有 1/8"
- Only 1/8" for female thread

直通計量閥

METERING VALVE

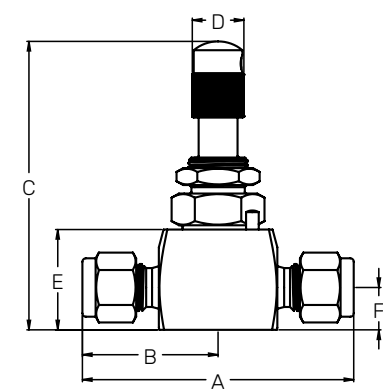

類型 Type		連接尺寸 Conn./Size	流孔孔徑 Orifice		尺寸表 Dimensions (mm)					
		進口 / 出口尺寸 Inlet/Outlet	mm	in.	A	B	C	D	E	F
卡套 JPE TUBE END	公制 Metric	3mm	1.4	0.055	59	29.5	70	11.5	23.7	10
		4mm	1.4	0.055	60	30	70	11.5	23.7	10
		6mm	1.4	0.055	63	31.5	70	11.5	23.7	10
	英制 Fractional	1/8"	1.4	0.055	60	30	70	11.5	23.7	10
		3/16"	1.4	0.055	60	30	70	11.5	23.7	10
		1/4"	1.4	0.055	64	32	70	11.5	23.7	10
外螺紋 MALE THREAD	英制 Fractional	1/8"	1.4	0.055	48	24	70	11.5	23.7	10
		1/4"	1.4	0.055	54	27	70	11.5	23.7	10
內螺紋 FEMALE THREAD	英制 Fractional	1/8"	1.4	0.055	48	24	70	11.5	23.7	10